



GE APPLIANCES

# Installation Instructions for your new

## RAVRG4

### Large Access Panel with reversible hinges and return air grille

Before you begin - Read these instructions completely and carefully.

**IMPORTANT – OBSERVE ALL GOVERNING CODES AND ORDINANCES.**

**Note to Installer – Be sure to leave these instructions with the Consumer.**


**Note to Consumer – Keep these instructions with your Owner’s Manual for future reference.**

#### Parts Included

- Return Air Grille/Access Panel
- (57 3/8" Tall x 29 3/8" Wide)
- Mounting Frame
- Access Panel Screws


#### Materials Needed (Field Supplied Parts)

- 24" x 20" Filter (2 inch maximum thickness)  
(Do not use if using a chassis mounted filter)
- Mounting screws, 4 #8 x 1 1/2"

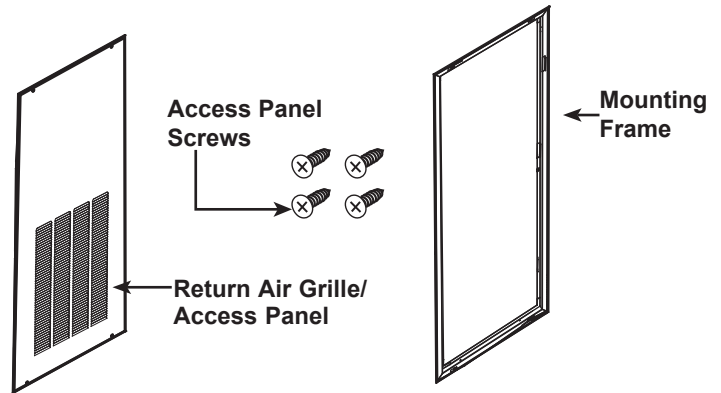

#### Installation Overview


Frame and sheetrock the access hole to 28 1/8" wide and 55 7/8" tall. The bottom of the opening should be at the same level as the floor or platform the air conditioning unit is placed on. The chassis must fit through this opening.

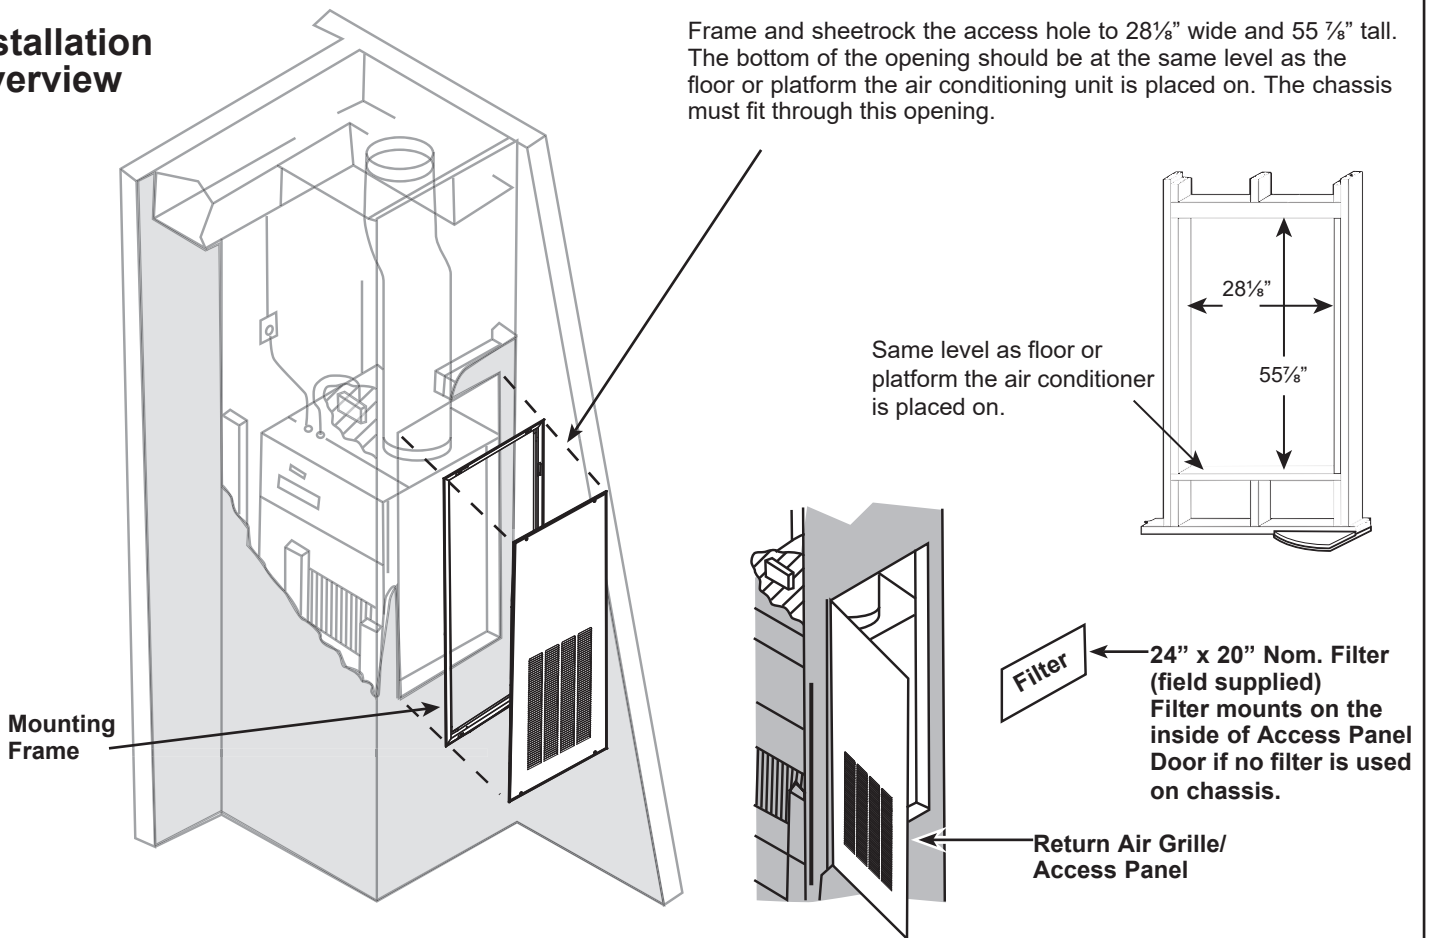


# Installation Instructions

## STEP 1 Mounting the Access Panel frame


Remove the Access panel from the frame by removing the 4 screws. Set the panel aside and retain the screws.

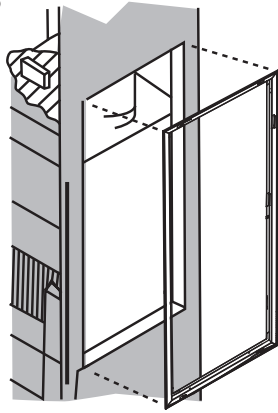

For a left hand hinge mount the door frame with the three hinge tabs on the left side.

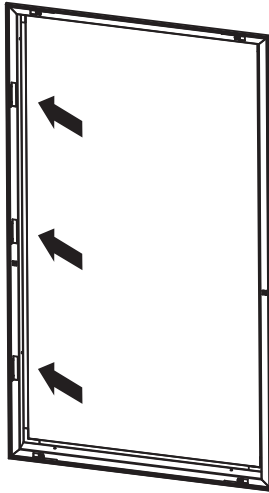

For a right hand hinge mount the door frame with the three hinge tabs on the right side.

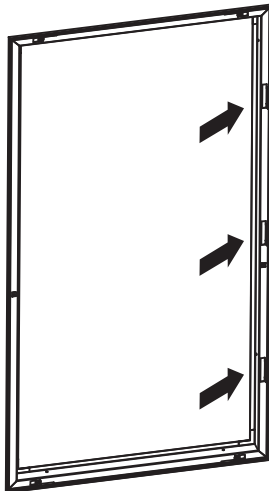


After determining the left or right hinge position, secure with the four field supplied mounting screws. The Access panel frame must be plumb (vertical) and level.

## STEP 2 Mounting the Access Panel on the Mounting Frame

Install the Access Panel onto the Mounting frame.


Insert the Access panel slots over the tabs on the frame.

Be sure that the access panel has engaged all three tabs and the panel is against the mounting bracket.

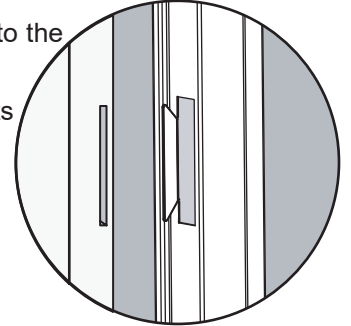

## STEP 3 Securing the Access Panel

To secure the Access panel to the mounting frame, use the four flat head screws removed in Step 1.

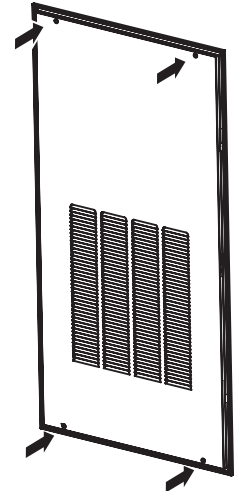

## For 1 Inch Thick Air Filters

When using a 1 inch thick air filter bend the four tabs inward to hold the filter securely against the louvers.

